



highblue®

THE BRIGHTER IDEA

Taking Innovation to New Depths

2019



C O N T E N T

AL250 P.35	Batteries P.64	TL2600P P.26
AL450WM Tail P.36	Camera Arms P.70	TL3500P P.27
AL450NM Tail P.37	Camera Clips & Accessories P.70	TL3500P Supreme P.34
ALI 100RAFO II P.40	Camera Trays P.62	TL4800P P.28
ALI 200NP II P.42	Camera Filters P.60	TL4800PC Slim P.30
ALI 200WP II P.43	CB6500P P.20	TL8000P P.32
ALI 200XWP II P.44	CB9000P P.22	VL4200P P.2
ALI 200NP Tail II P.38	CB I 5000P P.24	VL8000P Tri Color P.4
ALI 200WP Tail II P.39	CF450 II P.48	VLI 0000P P.6
ALI 800P Tri Color II P.46	CF I 200P II P.49	VLI 5000P Pro Mini P.8
AL2600XWP II P.47	Chargers P.64	VLI 5000P Pro Mini Tri Color P.10
	Combo Packs P.56	VL33000P II P.12
	Easy Clip Lights P.54	VTL2600P P.14
	Easy Release Mount Series P.68	VTL3800P P.15
	Float Arms, Flexi Arms P.69	VTL8000P P.16
	Fluorodive Kits P.60	VTL8000PC Slim P.18
	Gloves, Hoods & Handles P.65	
	HL450N P.50	
	HL450XW P.51	
	HLI 000N P.52	
	HLI 000XW P.53	
	Light Filters P.66	
	Light Head P.45	
	Outdoor Dry Bags P.68	
	Protective Case Series P.59	
	RGB White II P.41	
	Red Spot Light & Green Spot Light P.58	
	Snoots P.66	
	Spring Cord P.67	

VL4200P

Li ion Rechargeable Battery LED Video Light



Available in 3 colors

SPECIFICATIONS

Light source	6 x XML LED + 4 x XPE Red LED
Light output (Flood beam mode)	420 Lm (level I), 1050 Lm (level II) 2100 Lm (level III), 4200 Lm (level IV)
Light output (Red color mode)	200 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 44 x L. 121.1 mm
Weight in air	318 g (including battery)
Buoyancy in seawater	-167 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Sturdy glove for hands-free operation underwater



4 levels of brightness for Flood beam mode, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design



BATCELL 32650 Li ion Rechargeable Battery



Built-in red color led enhances focusing performance



Comes with ball joint for easy system setup



Removable yellow filter enhances warmer color tone



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Come with random color outdoor dry bag

VL8000P TRI COLOR

Li ion Rechargeable Battery High Power LED
Video Light with Three Color Output



SPECIFICATIONS

Light source	15 x XML LED + 6 x XPE Red LED
Light output (Cool white mode)	2000 Lm (level I), 4000 Lm (level II) 8000 Lm (level III)
Light output (Warm white mode)	1000 Lm (level I), 2000 Lm (level II) 4000 Lm (level III)
Light output (Red white mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x4
Angle of light beam	120° wide beam
Color temperature	6500K cool white and 5500K warm white
Burn time	3 hrs (level III), 6 hrs (level II) and 12 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.4 x L. 130.6mm
Weight in air	457 g (including battery)
Buoyancy in seawater	-173 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



3 Levels of brightness for cool white mode, 3 Levels of brightness for warm white mode 1 level of brightness of Red color mode and SOS controlled by a reliable push button design




Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL18650x4 Li ion Rechargeable Battery



Built-in red color led enhances focusing performance



Built-in yellow color led enhances warmer color tone



Sturdy glove for hands-free operation underwater



Comes with ball joint for easy system setup



Come with random color outdoor dry bag

VL10000P

Li ion Rechargeable Battery High Power
LED Video Light



SPECIFICATIONS

Light source	15 x XML LED + 6 x XPE Red LED
Light output	1000 Lm (level I), 2500 Lm (level II) 5000 Lm (level III), 10000 Lm (level IV)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x4
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2.5 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 25 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.4 x L. 130.6mm
Weight in air	457g (including battery)
Buoyancy in seawater	-173g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



BATCELL18650x4
Li ion Rechargeable
Battery



Built-in red color led
enhances focusing
performance



Removable yellow
filter enhances
warmer color tone



Sturdy glove for
hands-free operation
underwater



Comes with ball joint
for easy system setup



Come with
random color
outdoor dry bag

VL15000P PRO MINI

Li ion Rechargeable Battery Super
Power LED Video Light



15000
lumens



**15000
LUMENS**
Angle of light beam
160° wide beam

SPECIFICATIONS

Light source	24 x XML LED + 8 x XPE Red LED
Light output	1500 Lm (level I), 3750 Lm (level II) 7500 Lm (level III), 15000 Lm (level IV)
Light output (Red color mode)	1000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x7
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 131 mm
Weight in air	754 g (including battery)
Buoyancy in seawater	-295 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



4 levels of brightness
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



BATCELL I8650x7
Li ion Rechargeable
Battery



Built-in red color led
enhances focusing
performance



24pcs XML LED
to provide
15000 lumens



Comes with
ball joint for
easy system
setup



Ergonomic
aluminum handle
comes in a
package



Come with
protective case
for VL 15000P
Pro Mini.



FILFLUORO 15000
Fluorodive filter for
VL 15000P Pro Mini.
Sold separately.

VL15000P PRO MINI TRI COLOR

Li ion Rechargeable Battery Super Power LED
Video Light with Three Color Output



**15000
LUMENS**
Angle of light beam
160° wide beam

SPECIFICATIONS

Light source	32 x XML LED + 8 x XPE Red LED
Light output (Cool white mode)	3750 Lm (level I), 7500 Lm (level II) 15000 Lm (level III)
Light output (Warm white mode)	1500 Lm (level I), 3000 Lm (level II) 6000 Lm (level III)
Light output (Red color mode)	1000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x7
Angle of light beam	160° wide beam
Color temperature	6500K cool white and 5500K warm white
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 131 mm
Weight in air	769 g (including battery)
Buoyancy in seawater	-310 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



Battery level indicator built-in:
Blue color / Green color / Red color /
Flash Red color



BATCELL I8650x7
Li ion Rechargeable
Battery



Built-in red color
led enhances
focusing
performance



Built-in
yellow color
led enhances
warmer
color tone



Come with
protective case
for VL 15000P
Pro Mini Tri Color.



Ergonomic
aluminum
handle comes
in a package



FILFLUORO15000
Fluorodive filter for
VL 15000P Pro Mini
Tri Color.
Sold separately.



Comes with
ball joint for
easy system
setup



3 Levels of brightness for
cool white mode, 3 Levels
of brightness for warm
white mode, 1 level of
brightness of Red color
mode, and SOS controlled
by a reliable push button
design

VL33000P II

Li ion Rechargeable Battery
Ultra Power LED Video Light



SPECIFICATIONS

Light source	45 x XML LED + 10 x XPE Red LED
Light output	3300 Lm (level I), 8250 Lm (level II) 16500 Lm (level III), 33000 Lm (level IV)
Light output (Red color mode)	1200 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 21700x8
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 85 x L. 144.6mm
Weight in air	1391g (including battery)
Buoyancy in seawater	-597g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass

The Most
Brightness
**33000
LUMENS**
Angle of light beam
160°



4 levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



Easy to charge up the
battery pack
BATCELL 21700x8



Built-in red color led
enhances focusing
performance



45pcs XML LED to
provide 33000 lumens



Comes with ball joint
for easy system setup



Ergonomic aluminum
handle comes in a
package



Come with
protective case
for VL 33000P II.

VTL2600P

Li ion Rechargeable Battery LED Video / Tech Light



Available in 2 colors

100°
Wide Beam
10°
Narrow Beam



4 levels of brightness for Flood beam mode, 1 level of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design

SPECIFICATIONS

Light source	7 x LED + 2 x XPE Red LED
Light output (Flood beam mode)	260 Lm (level I), 650 Lm (level II) 1300 Lm (level III), 2600 Lm (level IV)
Light output (Spot beam mode)	1000 Lm
Light output (Red color mode)	100 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	100° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 44 x L. 128.7 mm
Weight in air	339 g (including battery)
Buoyancy in seawater	-177 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Sturdy glove for hands-free operation underwater



Removable yellow filter enhances warmer color tone



Built-in red color led enhances focusing performance



Angle of light beam



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Comes with ball joint for easy system setup



BATCELL 32650 Li ion Rechargeable Battery



Come with random color outdoor dry bag

VTL3800P

Li ion Rechargeable Battery LED Video / Tech Light



120°
Wide beam
10°
Narrow beam



4 levels of brightness for Flood beam mode, 1 level of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design

SPECIFICATIONS

Light source	7 x XML LED + 2 x XPE Red LED
Light output (Flood beam mode)	380 Lm (level I), 950 Lm (level II) 1900 Lm (level III), 3800 Lm (level IV)
Light output (Spot beam mode)	1200 Lm
Light output (Red color mode)	100 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.5 x L. 140.6 mm
Weight in air	432 g (including battery)
Buoyancy in seawater	-205 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included




Sturdy glove for hands-free operation underwater



Removable yellow filter enhances warmer color tone



Built-in red color led enhances focusing performance



Angle of light beam



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Comes with ball joint for easy system setup



BATCELL 32650 Li ion Rechargeable Battery



Come with random color outdoor dry bag

VTL8000P

Li ion Rechargeable Battery High Power LED Video / Tech Light

120°
Wide beam
10°
Narrow beam



SPECIFICATIONS

Light source	11 x XML LED + 6 x XPE Red LED
Light output (Flood beam mode)	800 Lm (level I), 2000 Lm (level II) 4000 Lm (level III), 8000 Lm (level IV)
Light output (Spot beam mode)	1200 Lm
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x4
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	3 hrs (level IV), 6 hrs (level III) 12 hrs (level II) and 30 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63x L. 150.3mm
Weight in air	548g (including battery)
Buoyancy in seawater	-203g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness for Flood beam mode, 1 level of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Angle of light beam



Built-in red color led enhances focusing performance



Removable yellow filter enhances warmer color tone



Sturdy glove for hands-free operation underwater



Comes with ball joint for easy system setup



BATCELL18650x4 Li ion Rechargeable Battery



Come with random color outdoor dry bag

VTL8000PC SLIM

Li ion Rechargeable Battery
High Power LED Video/Tech Light
with Battery Canister



SPECIFICATIONS

Light source	11 x XML LED + 6 x XPE Red LED
Light output (Flood beam mode)	800 Lm (level I), 2000 Lm (level II) 4000 Lm (level III), 8000 Lm (level IV)
Light output (Spot beam mode)	1200 Lm
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x8
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	6 hrs (level IV), 12 hrs (level III) 24 hrs (level II) and 60 hrs (level I)
Maximum depth	100 m tested
Size (Light head)	Dia. 63x L. 106.5mm
Size (Canister)	Dia. 55 x L. 181.5mm
Weight in air (Light head)	317g
Weight in air (Canister)	713g
Buoyancy in seawater (Light head)	-101g
Buoyancy in seawater (Canister)	-267g
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



Comes with
ball joint for
easy system
setup



BATCELL
18650x8
Li ion
Rechargeable
Battery



Battery level
indicator built-in:
Blue color /
Green color /
Red color /
Flash Red color



Built-in red
color led
enhances
focusing
performance



Slim fit
Goodman
handle with
connector.
Comes in
a package



Removable
yellow
filter
enhances
warmer
color tone



Easy to
charge up
the canister



Angle of
light beam



VTL8000PCLH
light head and
Canister for
VTL8000PC
Slim can buy
seperately.



90 degree
sidemount
connector
cable.
Sold seperately.



Come with
protective case
for VTL 8000
PC Slim



4 Levels of brightness for
Flood beam mode, I level
of brightness for Spot
beam mode and I level
of brightness for Red
color mode controlled by
a reliable push
button design

CB6500P

Li ion Rechargeable Battery High Power
LED Video Light with High Color Rendering Index



SPECIFICATIONS

Light source	COB LED + 6 x XPE Red LED
Light output	650 Lm (level I), 1625 Lm (level II) 3250 Lm (level III), 6500 Lm (level IV)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 27100x4
Angle of light beam	120° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 134.6mm
Weight in air	653g (including battery)
Buoyancy in seawater	-272g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



BATCELL 27100x4
Li ion Rechargeable
Battery



Snoot 63
Snoot connector for
CB6500P.
Sold separately.



Built-in red color led
enhances focusing
performance



Sturdy glove for
hands-free operation
underwater



Comes with ball joint
for easy system setup



Come with
random color
outdoor dry bag

CB9000P

Li ion Rechargeable Battery High Power
LED Video Light with High Color
Rendering Index



SPECIFICATIONS

Light source	COB LED + 6 x XPE Red LED
Light output	900 Lm (level I), 2250 Lm (level II) 4500 Lm (level III), 9000 Lm (level IV)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 27100x4
Angle of light beam	120° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 134.6mm
Weight in air	654g (including battery)
Buoyancy in seawater	-273g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design




Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



BATCELL 27100x4
Li ion Rechargeable
Battery



Snoot 63
Snoot connector for
CB 9000P.
Sold separately.



Built-in red color led
enhances focusing
performance



Sturdy glove for
hands-free operation
underwater



Comes with ball joint
for easy system setup



Come with
random color
outdoor dry bag

CB15000P

Li ion Rechargeable Battery Super Power
LED Video Light with High Color
Rendering Index



SPECIFICATIONS

Light source	COB LED + 8 x XPE Red LED
Light output	1500 Lm (level I), 3750 Lm (level II) 7500 Lm (level III), 15000 Lm (level IV)
Light output (Red color mode)	1000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x7
Angle of light beam	160° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 131mm
Weight in air	773g (including battery)
Buoyancy in seawater	-314g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass

**15000
LUMENS**
Angle of light beam
160° wide beam



4 levels of brightness
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



BATCELL18650x7
Li ion Rechargeable
Battery



Built-in red color led
enhances focusing
performance



COB LED
to provide
15000 lumens



Comes with
ball joint for
easy system
setup



Ergonomic
aluminum handle
comes in a
package



Come with
protective case
for CB15000P.



FILFLUORO15000
Fluorodrive filter for
CB15000P.
Sold separately.

TL2600P

Li ion Rechargeable Battery
LED Tech Light



Available in 2 colors



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color

SPECIFICATIONS

Light source	3 x LED
Light output	260 Lm (level I), 650 Lm (level II) 1300 Lm (level III), 2600 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 50x L. 130 mm
Weight in air	359 g (including battery)
Buoyancy in seawater	-188 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Ergonomic aluminum
handle comes in a
package



BATCELL 32650 Li ion
Rechargeable Battery



Goodman handle
with connector or
Slim fit Goodman handle
with connector. Sold
separately.



Sturdy Goodman Glove
for handy Tech-diving
operation



Come with
random color
outdoor dry bag

TL3500P

Li ion Rechargeable Battery
LED Tech Light



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color

SPECIFICATIONS

Light source	3 x XML LED
Light output	350 Lm (level I), 875 Lm (level II) 1750 Lm (level III), 3500 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 63x L. 135.6 mm
Weight in air	447 g (including battery)
Buoyancy in seawater	-217 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Ergonomic aluminum
handle comes in a
package



BATCELL 32650 Li ion
Rechargeable Battery



Goodman handle
with connector or
Slim fit Goodman handle
with connector. Sold
separately.



Sturdy Goodman Glove
for handy Tech-diving
operation



Come with
random color
outdoor dry bag

TL4800P

Li ion Rechargeable Battery High Power LED Tech Light



SPECIFICATIONS

Light source	4 x XML LED
Light output	480 Lm (level I), 1200 Lm (level II) 2400 Lm (level III), 4800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x4
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 72 x L. 150.3mm
Weight in air	596 g (including battery)
Buoyancy in seawater	-222 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness and SOS controlled by a reliable push button design



BATCELL I8650x4 Li ion Rechargeable Battery



Sturdy Goodman Glove for handy Tech-dive operation



Ergonomic aluminum handle comes in a package



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Goodman handle with connector or Slim fit Goodman handle with connector. Sold separately.



Come with random color outdoor dry bag

TL4800PC SLIM

Li ion Rechargeable Battery
High Power LED Tech Light with
Battery Canister



4800
lumens



SPECIFICATIONS

Light source	4 x XML LED
Light output	480 Lm (level I), 1200 Lm (level II) 2400 Lm (level III), 4800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x8
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	7 hrs (level IV), 14 hrs (level III) 28 hrs (level II) and 70 hrs (level I)
Maximum depth	100 m tested
Size (Light head)	Dia. 72 x L. 88.3mm
Size (Canister)	Dia. 55 x L. 181.5mm
Weight in air (Light head)	380g
Weight in air (Canister)	713g
Buoyancy in seawater (Light head)	-134g
Buoyancy in seawater (Canister)	-267g
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



BATCELL I8650x8
Li ion Rechargeable
Battery



Ergonomic
aluminum handle
comes in a
package



Slim fit Goodman
handle with con-
nector. Comes in
a package



Easy to charge
up the canister



90 degree
sidemount
connector cable.
Sold separately.



TL4800PCLH light
head and Canister
for TL4800PC Slim
can buy separately.



Come with
protective case
for TL 4800
PC Slim

TL8000P

Li ion Rechargeable Battery Super
Power LED Tech Light



SPECIFICATIONS

Light source	8 x LED
Light output	800 Lm (level I), 2000 Lm (level II) 4000 Lm (level III), 8000 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x7
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 72 x L. 138.8 mm
Weight in air	784 g (including battery)
Buoyancy in seawater	-290 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



4 levels of brightness
and SOS controlled by
a reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



BATCELL I8650x7
Li ion Rechargeable
Battery



Ergonomic aluminum
handle comes in a
package



Slim fit Goodman
handle with con-
nector. Comes in a
package



Come with
random color
outdoor dry bag

TL3500P SUPREME

Li ion Rechargeable Battery
LED Tech Light

ERM
EASY RELEASE
MOUNT

3500
lumens



Battery level indicator
built-in: Blue color /
Green color /
Red color /
Flash Red color

SPECIFICATIONS

Light source	3 x XML LED
Light output	350 Lm (level I), 875 Lm (level II) 1750 Lm (level III), 3500 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x4 SUPREME
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	3 hrs (level IV), 6 hrs (level III) 12 hrs (level II) and 30 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 63x L. 119 mm
Weight in air	517 g (including battery)
Buoyancy in seawater	-221 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Ergonomic aluminum
handle comes in a
package



BATCELL I8650x4 SUPREME
Li ion Rechargeable
Battery



Goodman handle
with connector or
Slim fit Goodman
handle with connector.
Sold separately.



Sturdy Goodman Glove
for handy Tech-dive
operation



Come with
random color
outdoor dry bag

AL250

Multi-Function Aluminum LED Light

250
lumens



SPECIFICATIONS

Light source	1 x XPG LED
Light output	250 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	2xAA alkaline or Ni-MH batteries
Angle of light beam	8° narrow beam
Color temperature	6500K
Burn time	Up to 2 hrs
Maximum depth	100 m tested
Size	Dia. 28x L. 147.8 mm
Weight in air	135 g (including battery)
Buoyancy in seawater	-85 g (including battery)
Front glass	Tempered optical glass
Lanyard	Included



Light is suitable for multi-function



Operate with 2xAA
batteries



Our light can fit in
glove or pouch. Sold
separately.



Available in 5 colors

AL450WM TAIL

LED Aluminum Diving Light with Tail Switch Button

450
lumens



Push on / off button on the bottom



3xAAA stand-alone battery holder



AL 450WM Tail LED with Glove



AL 450WM Tail LED with Pouch



AL 450WM Tail LED with Pouch and Glove

SPECIFICATIONS

- 450 Lumens Cree LED
- Size : Dia.36 x L.122.6mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Angle of light beam: 40°
- Up to 4hrs of burn time
- Lanyard included
- 160g (including batteries) weight in air
- -74g (including batteries) buoyancy in seawater
- Switching System : Push Button

AL450NM TAIL SPOTTER

Narrow Beam Aluminum LED Light with Tail Switch Button

450
lumens



Push on / off button on the bottom



3xAAA stand-alone battery holder



AL 450NM Tail LED with Glove



AL 450NM Tail LED with Pouch



AL 450NM Tail LED with Pouch and Glove

SPECIFICATIONS

- 450 Lumens Cree LED
- Size : Dia.42 x L.125.4mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Angle of light beam: 8°
- Up to 4hrs of burn time
- Lanyard included
- 185g (including batteries) weight in air
- -79g (including batteries) buoyancy in seawater
- Switching System : Push Button

AL1200NP TAIL II

Li ion Rechargeable Battery Narrow Beam LED Light with Tail Switch Button



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



4 Levels of brightness and SOS controlled by a reliable push button design



Protective case for AL 1200NP Tail II. Sold separately.



Our light can fit in glove or pouch. Sold separately.



FILREDNP Red filter for AL1200NP Tail II Sold separately.



BATCELL 18650 Li ion Rechargeable Battery



Come with random color outdoor dry bag

SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 33.2 x L. 152.2 mm
Weight in air	189 g (including battery)
Buoyancy in seawater	-87 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

AL1200WP TAIL II

Li ion Rechargeable Battery Wide Beam LED Light with Tail Switch Button



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



4 Levels of brightness and SOS controlled by a reliable push button design



Comes with the clip for easy system setup



Snoot connector for AL1200WP Tail II. Sold separately.



Our light can fit in glove or pouch. Sold separately.



FILYEL 35 FILRED 35 Removable red and yellow filters enhances focusing performances and warm color tone



Protective case for AL 1200WP Tail II. Sold separately.



BATCELL 18650 Li ion Rechargeable Battery



Come with random color outdoor dry bag

SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 137.7 mm
Weight in air	177 g (including battery)
Buoyancy in seawater	-88 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included

AL1100 RAFO II



Li ion Rechargeable Battery
Wide Beam LED Light with
Auto-Flash Off Function



Battery level indicator
built-in: Blue color /
Green color /
Red color /
Flash Red color



4 levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Comes with ball joint
for easy system setup



Automatic Flash Off
Function AFO interval:
0.2 sec. +/- 0.1 sec.



Built-in red color
led enhances
focusing
performance



BATCELL 18650 Li ion
Rechargeable Battery



Come with
random color
outdoor dry bag

SPECIFICATIONS

Light source	XML LED + 2 x XPE Red LED
Light output	110 Lm (level I), 275 Lm (level II) 550 Lm (level III), 1100 Lm (level IV)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	55° wide beam
Color temperature	6500K
AFO interval	0.2sec. +/- 0.1 sec.
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 42.4 x L. 128.3 mm
Weight in air	242 g (including battery)
Buoyancy in seawater	-129 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

RGB WHITE II



Li ion Rechargeable Battery
4 Colors LED Light



Battery level indicator
built-in: Blue color /
Green color / Red color /
Flash Red color



4 colors of light and
SOS controlled by a
reliable push button
design



Built-in red color Led



Comes with the clip for
easy system setup



Built-in green color Led



Snoot Connector for
RGB White II.
Sold separately.



Built-in blue color Led



BATCELL 18650 Li ion
Rechargeable Battery



Come with
random color
outdoor dry bag

SPECIFICATIONS

Light source	LED
Light output	500 Lm (white), 120 Lm (red) 40 Lm (blue), 300 Lm (green)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Color temperature	6500K
Burn time	2 hrs
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.3 mm
Weight in air	162 g (including battery)
Buoyancy in seawater	-84 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included

AL1200NP II

Li ion Rechargeable Battery
Narrow Beam LED Light



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



4 Levels of brightness and SOS controlled by a reliable push button design



Protective case for AL 1200NP II. Sold separately.



Our light can fit in glove or pouch. Sold separately.



FILREDNP Red filter for AL1200NP II. Sold separately.



BATCELL 18650 Li ion Rechargeable Battery



Come with random color outdoor dry bag

SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 33.2 x L. 139.8 mm
Weight in air	168 g (including battery)
Buoyancy in seawater	-76 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

AL1200WP II

Li ion Rechargeable Battery
Wide Beam LED Light



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



4 Levels of brightness and SOS controlled by a reliable push button design



Comes with the clip for easy system setup



FILRED 35 Removable red and yellow filters enhances focusing performances and warm color tone



Our light can fit in glove or pouch. Sold separately.



Snoot Connector for AL1200WP II. Sold separately.



Protective case for AL 1200WP II. Sold separately.



BATCELL 18650 Li ion Rechargeable Battery




Come with random color outdoor dry bag

SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.3 mm
Weight in air	162 g (including battery)
Buoyancy in seawater	-84 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included

AL1200xWP II

Li ion Rechargeable Battery Extra
Wide Beam LED Light



SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 122.1 mm
Weight in air	160 g (including battery)
Buoyancy in seawater	-84 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Battery level indicator
built-in: Blue color /
Green color / Red color /
Flash Red color

4 Levels of brightness
and SOS controlled by
a reliable push button
design



FILYEL 35 FILRED 35
Removable red and
yellow filters enhances
focusing performances
and warm color tone



Comes with the clip
for easy system setup



Our light can fit in
glove or pouch. Sold
separately.



Snoot Connector for
AL1200xWP II.
Sold separately.



Protective case for
AL1200xWP II.
Sold separately.



BATCELL 18650 Li ion
Rechargeable Battery



Come with
random color
outdoor dry bag



LIGHT HEAD

Light heads can fit for VTL 3800P & TL 3500P.

Light heads can fit for VL 4200P,
VTL 2600P & TL2600P



BLACK MOLLY IV

AL1800XWP II TRI COLOR



Available in 2 colors

SPECIFICATIONS

Light source	4 x XML LED + 2 x XPE Red LED
Light output (Cool white mode)	450Lm (level I), 900 Lm (level II) 1800 Lm (level III)
Light output (Warm white mode)	450Lm (level I), 900 Lm (level II) 1800 Lm (level III)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 26650
Angle of light beam	120° wide beam
Color temperature	6500K cool white and 5500K warm white
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.8 mm
Weight in air	218 g (including battery)
Buoyancy in seawater	-105 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Built-in red color led enhances focusing performance



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Built in yellow color led enhances warmer color tone



Protective case for AL 1800XWP Tri Color II and Single Arm Tray. Sold separately.



3 Levels of brightness for cool white mode, 3 Levels of brightness for warm white mode 1 level of brightness of Red color mode and SOS controlled by a reliable push button design



BATCELL26650 Li ion Rechargeable Battery



Comes with ball joint for easy system setup



Protective case for AL 1800XWP Tri Color II. Sold separately.



Come with random color outdoor dry bag

BLACK MOLLY V

AL2600XWP II



Available in 2 colors

SPECIFICATIONS

Light source	4 x XML LED + 2 x XPE Red LED
Light output	260 Lm (level I), 650 Lm (level II) 1300 Lm (level III), 2600 Lm (level IV)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 26650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.8 mm
Weight in air	218 g (including battery)
Buoyancy in seawater	-105 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Built-in red color led enhances focusing performance



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL26650 Li ion Rechargeable Battery



Protective case for AL 2600XWP II and Single Arm Tray. Sold separately.



4 levels of brightness, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design



Removable yellow filter enhances warmer color tone



Comes with ball joint for easy system setup



Protective case for AL 2600XWP II. Sold separately.



Come with random color outdoor dry bag

CF450 II



Available in 2 colors

SPECIFICATIONS

Light source	Cree LED
Light output	450 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	3xAAA alkaline or Ni-MH batteries
Angle of light beam	7° to 37° adjustable
Color temperature	6500K
Burn time	Up to 4hrs
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 131.9mm
Weight in air	216 g (including batteries)
Buoyancy in seawater	-104 g (including batteries)
Switching system	Magnetic Swivel
Front glass	Tempered optical glass & Convex Lens
Lanyard	Included



Twist the front to change the focus (Turning force increases with depth)



Magnetic Swivel Switch allows for one hand operation



CF 450 II LED with Glove



3xAAA stand-alone battery holder



CF 450 II LED with Pouch



CF 450 II LED with Pouch and Glove

CF1200P II



Li ion Rechargeable Battery
Changeable Focus LED Light



SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	7° narrow beam to 37° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 169.3mm
Weight in air	245 g (including battery)
Buoyancy in seawater	-121 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



4 Levels of brightness and SOS controlled by a reliable push button design



Twist the front to change the focus (Turning force increases with depth)



BATCELL 18650 Li ion Rechargeable Battery



Come with random color outdoor dry bag

HL450N

Narrow Beam LED Head Light

450
lumens



SPECIFICATIONS

Light source	Cree LED
Light output	45 Lm (level I), 113 Lm (level II) 225 Lm (level III), 450 Lm (level IV)
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	3 x AAA alkaline batteries
Angle of light beam	8° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 41 mm
Weight in air	187 g (including batteries)
Buoyancy in seawater	-56 g (including batteries)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



4 levels of brightness
and SOS controlled by
a reliable push button
design



3 x AAA alkaline
batteries



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



FILREDHLN Red
filter for HL 450N.
Sold separately.

HL450xw

Extra Wide Beam LED Head Light

450
lumens



SPECIFICATIONS

Light source	2 x Cree LED +2 x XPE Red LED
Light output	45 Lm (level I), 113 Lm (level II) 225 Lm (level III), 450 Lm (level IV) 100 Lm
Light output (Red color mode)	
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	3 x AAA alkaline batteries
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 38.8 mm
Weight in air	189 g (including batteries)
Buoyancy in seawater	-58 g (including batteries)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



Built-in red color led
enhances focusing
performance



4 levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



3 x AAA alkaline
batteries

HL1000N

Li ion Rechargeable Battery
Narrow Beam LED Head Light

1000
lumens



SPECIFICATIONS

Light source	Cree LED
Light output	100 Lm (level I), 250 Lm (level II) 500 Lm (level III), 1000 Lm (level IV)
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	Li ion Rechargeable battery pack BATCELL18650
Angle of light beam	8° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 41 mm
Weight in air	205 g (including battery)
Buoyancy in seawater	-74 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



4 levels of brightness
and SOS controlled by
a reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



BATCELL18650 Li ion
Rechargeable Battery



FILREDHLN Red filter
for HL1000N.
Sold separately.

HL1000xw

Li ion Rechargeable Battery
Extra Wide Beam LED Head Light

1000
lumens



SPECIFICATIONS

Light source	2 x Cree LED +2 x XPE Red LED
Light output	100 Lm (level I), 250 Lm (level II) 500 Lm (level III), 1000 Lm (level IV)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	Li ion Rechargeable battery pack BATCELL18650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 38.8mm
Weight in air	207 g (including battery)
Buoyancy in seawater	-76 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



Built-in red color led
enhances focusing
performance



4 levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



BATCELL18650 Li ion
Rechargeable Battery

EASY CLIP RAINBOW COLOR LIGHT



SPECIFICATIONS

- Available fifteen color output – Red, Green, Orange, Blue, Purple, Yellow, Light Blue, Flash red, Flash green, Flash orange, Flash blue, Flash purple, Flash yellow, Flash light blue automatically run all fourteen modes.
- 12-24 hrs of burn time
- 2 x CR2032 batteries
- Dia. 32 x L. 38mm
- 100 meter tested
- Lanyard included
- 23g (including batteries) weight in air
- -3g (including batteries) buoyancy in seawater

EASY CLIP LIGHT WITH FLASH



SPECIFICATIONS

- Available six color output – Blue, Red, Green, Flash Blue, Flash Red, Flash Green,
- Up to 36 hrs of burn time
- 2 x CR2032 batteries
- Dia. 32 x L. 38mm
- 100 meter tested
- Lanyard included
- 23g (including batteries) weight in air
- -3g (including batteries) buoyancy in seawater

Easily clip the light on the
goggle, mask, belt and etc.

COMBO PACK SERIES

AL 450 NM Tail Spotter
Narrow Beam Aluminum LED Light with
Tail Switch Button

AL 1200NP II

Li ion Rechargeable Battery Narrow
Beam LED Light

Easy Clip Rainbow Color light



AL 450 WM Tail

LED Aluminum Diving Light with
Tail Switch Button

AL 1200NP II

Li ion Rechargeable Battery Narrow
Beam LED Light

Easy Clip Rainbow Color light



AL 450 NM Tail Spotter

Narrow Beam Aluminum LED Light with
Tail Switch Button

AL 1200WP II

Li ion Rechargeable Battery Wide
Beam LED Light

Easy Clip Rainbow Color light



AL 450 WM Tail

LED Aluminum Diving Light with
Tail Switch Button

AL 1200WP II

Li ion Rechargeable Battery Wide
Beam LED Light

Easy Clip Rainbow Color light



AL 250

Multi-Function Aluminum LED Light

AL 1200NP II

Li ion Rechargeable battery
Narrow Beam LED Light

Easy Clip Rainbow Color light



AL 250

Multi-Function Aluminum LED Light

AL 1200WP II

Li ion Rechargeable battery
Wide Beam LED Light

Easy Clip Rainbow Color light



GREEN SPOT LIGHT RED SPOT LIGHT



Operate with
2 x AAA batteries



CLIPMNTSPOT
Mounting clip for Green Spot Light
and Red Spot Light. Sold separately.

SPECIFICATIONS

GREEN SPOT LIGHT

RED SPOT LIGHT

Light source : Green Laser
Light output : Below 1 mW
Casing material : Aluminum alloy.
Anti-corrosive anodized
Power source : 2 x AAA alkaline or
Ni-MH batteries
Wavelength : 520nm
Burn time : Up to 24 hrs
Maximum depth : 100 m tested
Size : Dia. 19 x L. 168.6 mm
Weight in air : 89 g (including batteries)
Buoyancy in seawater : -54 g (including batteries)
Switching system : Twisting Bezel
Front glass : Tempered optical glass
Lanyard : Included

Red Laser
Below 1 mW
Aluminum alloy.
Anti-corrosive anodized
2 x AAA alkaline or
Ni-MH batteries
650nm
Up to 24 hrs
100 m tested
Dia. 19 x L. 154.1 mm
82 g (including batteries)
-51 g (including batteries)
Twisting Bezel
Tempered optical glass
Included

PROTECTIVE CASE SERIES



Model :	PC101 A	PC102 A	PC103 A	PC104 A	PC105 A	PC106 A
Outer Dimension :	225 x 180 x 100 mm	350 x 270 x 120 mm	340 x 310 x 120 mm	360 x 285 x 190 mm	420 x 360 x 130 mm	420 x 360 x 190 mm
Inner Dimension :	200 x 135 x 85 mm	325 x 210 x 110 mm	310 x 250 x 107 mm	330 x 270 x 175 mm	380 x 310 x 120 mm	380 x 310 x 180 mm
Case can fit for :	AL1200NP II, AL1200WP II, AL1200XWP II, CF1200P II, Black Molly IV, Black Molly V, AL1200NP Tail II, AL1200WPTail II, AL1100RAFO II, RGB White II	VL4200P, VTL3800P, TL3500P, TL3500P Supreme, VTL2600P, TL2600P VLI1000P, VL8000P Tri Color, VTL8000P, TL4800P, TL8000P, CB6500P, CB9000P, CB15000P, VLI5000P Pro Mini, VLI5000P Pro Mini TC, VL33000P II	TL4800PC Slim, VTL8000PC Slim	All Purpose	Go Pro Tray Kit Set	All Purpose


FLUORODIVE KIT SETS

Science has discovered corals contain Fluorescent Proteins invisible to the naked eye that jump into view using innovative high-intensity fluorolights and filters.

Bigblue Fluorodive Kits provide everything you need to experience this incredibly beautiful effect. You get specially designed filters to precisely match the coral fluorescence wavelength, and yellow blue-barrier filters to increase the intensity of the colors emitted by the corals. Our innovative design is the only one that allows you to easily switch between blue and white light to accommodate changes in dive conditions.

These kits are suitable for night divers, resorts, science institutions, ecological monitoring groups and specialty photographers.

Truly there is nothing that can match the beauty of witnessing coral fluorescence on your next night dive!




CAMERA FILTERS

Camera filters are available for you to capture the macro or wide angle photos or videos of the memorable aquatic creatures.

Photos of the fluorescence stimulated by the specific wavelength and captured through a barrier filter

FDK38

CF450 / CF1200P / AL1200WP / AL1200XWP / AL1200WP Tail / BLACK MOLLY II / BLACK MOLLY III Fluorodive Kit

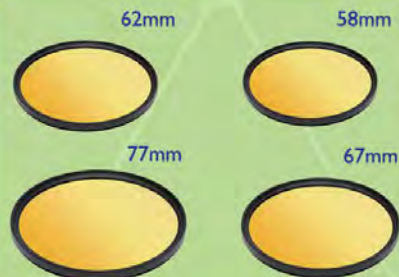

FILFLUOR015000

Fluorodive filter for VL 15000P Pro Mini / VL 15000P Pro Mini Tri Color / CB15000P



BLUE FILTER YELLOW MASK

FDK35

CF450 II / CF1200P II / AL1200WP II / AL1200XWP II / AL1200WP Tail II / BLACK MOLLY IV / BLACK MOLLY V Fluorodive Kit



BLUE FILTER YELLOW MASK

FDK63

CB6500P / CB9000P / VTL8000P Fluorodive Kit



BLUE FILTER YELLOW MASK

FDK55

VTL3800P / VL10000P VL8000P Tri Color Fluorodive Kit



BLUE FILTER YELLOW MASK

FDK44

VL4200P / VTL2600P Fluorodive Kit



BLUE FILTER YELLOW MASK

CAMERA TRAY 27



Camera Tray 27 with 27cm long tray.
Two 1" Ball joint arms with no-slip grip.
Compatible with Olympus TG4/ TG5 Housings.

BBGPTRAY

Go Pro Tray



Go Pro
Hot Shoe Adapter



GO PRO KIT SETS

GP4200 Kit

- 1 pc. of Double Clip (CLP02)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Light not included



GP1200 Kit

- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Lights not included



GP450 Kit

- 2 pcs. of Mounting Clip (CLIPMINTCF)
- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Lights not included



Protective Case for Go Pro Tray Kit Set

- 1 pcs. of ALI200WP II
- 1 pcs. of ALI200XWP II
- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)



EXTENDGPTRAY

Extendable Go Pro Tray



Extend from 176mm
to 287mm



SINGLEARMTRAY

Single Arm Go Pro Tray



FLEXIGPTRAY

7" Flexi Arm Go Pro Tray



FLEXISINGLEARMTRAY

7" Flexi Arm Single Arm Tray



FLEXIEXTENDGPTRAY

7" Flexi Arm Extendable
Go Pro Tray

BATTERIES & CHARGERS



BATCELL I8650

Battery for AL1200NP II / AL1200VWP II / AL1200XWP II / AL1200NP Tail II / AL1200WPTail II / CF1200P II / AL1100RAFO II / HL1000XW / HL1000N / RGBWhite II



BATCELL26650

Battery for Black Molly IV / Black Molly V



BATCELL32650

Battery for VL4200P / VTL3800P / TL3500P / VTL2600P / TL2600P



BATCELL I8650x4

Battery for VL1000P / VTL8000P / TL4800P / VL8000P Tri Color



BATCELL2 I700x4

Battery for CB6500P / CB9000P



BATCELL I8650x7

Battery for VL15000P Pro Mini / VL15000P Pro Mini Tri Color / CB15000P / TL8000P



CR2032

Battery for Easy Clip Light



BATCELL I8650x8

Battery for TL4800PC Slim / VTL8000PC Slim



BATCELL I8650x4SUPREME

Battery for TL3500P Supreme



BATCELL2 I700x8

Battery for VL33000P II



BATCHR I8650x4

Charger for VL1000P / VTL8000P / TL4800P / VL8000P Tri Color



BATCHR2 I700x4

Charger for CB6500P / CB9000P



BATCHR I8650x4 SUPREME

Charger for TL3500P Supreme



BATCHR2 I700x8

Charger for VL33000P II



BATCHR I8650x7

Charger for VL15000P Pro Mini / VL15000P Pro Mini Tri Color / CB15000P / TL8000P



BATCHR32650/26650

Charger for VL4200P / VTL3800P / TL3500P / Black Molly IV / Black Molly V / VTL2600P / TL2600P



BATCHR I8650x8

Charger for TL4800PC Slim / VTL8000PC Slim



BATCHR I8650

Charger for AL1200NP II / AL1200VWP II / AL1200XWP II / AL1200NP Tail II / AL1200WPTail II / CF1200P II / AL1100RAFO II / HL1000XW / HL1000N / RGBWhite II

ACCESSORIES



TLGGLOVE

Goodman glove for TL2600P / VTL2600P / TL3500P Supreme / VL4200P / VTL3800P / TL3500P / VL10000P / VTL8000P / TL4800P / VL8000P Tri Color / CB6500P / CB9000P / Black Molly IV / Black Molly V



NPGGLOVE M

Neoprene glove for Mini Light



NPGGLOVE L

Neoprene glove for AL1200NP II / AL1200VWP II / AL1200XWP II / AL1200NP Tail II / AL1200WPTail II



PISTOLGRIPHANDLE

Pistol Grip Handle for Black Molly IV / Black Molly V / TL2600P / VTL2600P / TL3500P / VTL3800P / TL3500P Supreme / VL4200P / CB6500P / CB9000P / VL10000P / VL8000P Tri Color / VTL8000P / TL4800P / TL8000P / VL15000P Pro Mini / VL15000P Pro Mini Tri Color / CB15000P



SIDEMOUNTCONNECTOR CABLE-90

90 degree sidemount connector cable for TL4800PC Slim / VTL8000PC Slim




CONNECTOR CABLE-180

180 degree connector cable for TL4800PC Slim / VTL8000PC Slim



LNTHANDLE

Lantern style handle



GHA-01C

Goodman handle with connector for TL2600P / TL3500P / TL4800P / TL4800PC Slim / VTL8000PC Slim / TL3500P Supreme / TL8000P



SFGHA-01C

Slim fit Goodman handle with connector for TL2600P / TL3500P / TL4800P / TL4800PC Slim / VTL8000PC Slim / TL3500P Supreme / TL8000P

ACCESSORIES



SNOOT 35

Snoot Connector for
AL1200WP II / AL1200XWP II /
AL1200WP Tail II / RGB White II



SNOOT 38

Snoot Connector for
AL1200WP / AL1200XWP /
AL1200WP Tail / RGB White



SNOOT 55

Snoot Connector for
VL6000P



CLIPMNTSPOT

Mounting clip for
Green Spot Light / Red Spot Light



CLIPMNTAL

Mounting clip for AL1200WP II /
AL1200XWP II / CF1200P II



CLIPMNTCF

Mounting clip for CF450 II /
AL450WM Tail / AL1200WP Tail II



SNOOT 63

Snoot Connector for
CB6500P / CB9000P



FILFLUORO15000

Fluorodive filter for
CB15000P / VL15000P Pro Mini /
VL15000P Pro Mini Tri Color



FDMASKYL

Yellow filter for Fluorodiving



GO PRO MOUNT

Go Pro Mount for
Go Pro Camera



1" BALL JOINT

1" Ball Joint fit for Black Molly IV / Black Molly V
VTL2600P / VL4200P / VTL3800P / VL8000P Tri Color / VL10000P /
VL4200P / VTL 8000P / CB6500P / CB9000P / VL33000P II /
VL15000P Pro Mini / VL15000P Pro Mini Tri Color / CB15000P



FILRED35

Red filter for AL1200WP II /
AL1200XWP II /
AL1200WP Tail II



FILREDSM

Red filter for AL1200WP /
AL1200XWP /
AL1200WP Tail



FILREDNP

Red filter for AL1200NP II /
AL1200NP Tail II



FILREDHLN

Red filter for HL1000N /
HL450N



SPRING CORD

Length : 330mm



EASY RELEASE MOUNT

Easy Release Mount fit for
helmet / DPV



FILYELG

Yellow filter for
VTL3800P / VL10000P



FILYELSM

Yellow filter for
AL1200WP /
AL1200XWP /
AL1200WP Tail /
Black Molly III



FILYEL35

Yellow filter for
AL1200WP II /
AL1200XWP II /
AL1200WP Tail II /
Black Molly V



FILYEL44

Yellow filter for
VL4200P / VTL2600P



FILYEL63

Yellow filter for
VTL8000P /
VTL8000PC Slim



NPHOODMS

Neoprene hood for one
light holster



NPHOODMD

Neoprene hood for two
light holster



NPRPOUCH

Neoprene pouch with
retractor for AL1200NP II /
AL1200WP II / AL1200XWP II /
AL1200NP Tail II / AL1200WP Tail II



NPRPOUCHM

Neoprene pouch with
retractor for Mini Light

ACCESSORIES

Outdoor Dry Bags



3L	5L	7L
Dia. 140 x L. 330 mm	Dia. 170 x L. 380 mm	Dia. 180 x L. 510 mm
Available in 5 colors Yellow, Green, Pink, Light Blue, Blue	Available in 5 colors Yellow, Green, Pink, Light Blue, Blue	Available in 6 colors Yellow, Green, Pink, Light Blue, Blue, Black

EASY RELEASE MOUNT SERIES



Easy Release
Glove



Easy Release
Goodman Handle



Easy Release
GoPro
Mount Glove



Easy Release
Slim Fit
Goodman Handle

PHOTO/VIDEO ARMS & ACCESSORIES

Float Arms Series



9" Float Arm

Dia. 70 x 228mm
Weight above water : 281g
Buoyancy lift : 360g



13" Float Arm

Dia. 70 x 330mm
Weight above water : 430g
Buoyancy lift : 612g

Flexi Arms Series



7" Flexi Arm



9" Flexi Arm



6" Flexi Arm
Hot Shoe YS Adapter



6" Flexi Arm
Hot Shoe Ball Adapter



YS Adapter

PHOTO/VIDEO ARMS & ACCESSORIES

Clips

- Made of T6061 grade aluminum
- Available in 2 versions: double clip and a triple clip
- Ergonomic handle makes it easy to twist on and off



CLP 02 Double clip



CLP 03 Triple clip

Arms

- Full T6061 grade aluminum
- Available in 4 lengths: 5", 8", 12", 16"



5" Arm



8" Arm



12" Arm



16" Arm

DA SERIES



DA001

Hot Shoe Adapter



DA002

Sea & Sea Adapter



DA003

Light & Motion Adapter



DA004

Standard Dovetail Plate



DA005

8mm Thread



DA006

Sea & Sea Light Adapter



DA007

Sea & Sea Hot Shoe Adapter



DA008

Sea & Sea Medium



DA009

Sea & Sea Standard



DA010

Base Plate Ball Mount



DA011

T-Groove Adapter



DA012

Universal Mount Base



DA013F

1/4" Thread Adapter



DA013M

1/4" Thread Adapter



DA014

Ikelite 200 Strobe Adapter



DA015

Single Ball Arm with Sea & Sea Adapter



DA016

UK Light Adapter



DA017

Standard Dovetail



DA018

Iron Z Series Strobe Adapter



DA022

Slot Stay



DA023

6mm Thread Adapter

Specifications subject to change without prior notice.

OUR DISTRIBUTORS & DEALERS

Australia Distributor : Adreno

Contact Person : Robbie Lewis
E-mail : robbie@adreno.com.au
Phone : 61-07-3391-2299
Mail : 54-58 Deshon Street, Woolloongabba,
Brisbane, QLD 4102, Australia

Austria Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 0 6 114 81 114
Mail : 1143 Route De La Jairaz – 73120
Courchevel, France

Belgium/ Netherlands / Luxembourg Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 0 6 114 81 114
Mail : 1143 Route De La Jairaz – 73120
Courchevel, France

Brazil Distributor : Seasub

Contact Person : Pablo Y. Varela
E-mail : pablo@seasub.com.br
Phone : 55-11-38328342
Mail : Rua Baumann, 1039/1051,
Cep 05318000,
Sao Paulo, Brazil

Canada Distributor : Pacific Scuba Industries

Contact Person : Michael Joseph &
Laura Valente
E-mail : laurabigblue@outlook.com
Phone : 778-245-1962
Mail : 31519 Southern Dr, Abbotsford,
BC V2T5P1, Canada

Czech Republic Distributor : Olson S.R.O

Contact Person : Ing. Barbora Peskova
E-mail : peskova@olson.cz
Phone : 420 602 376 896
Mail : Holesovicka Trznice, Hala C.16
Bubenske Nabrezi 306/13
170 04 Praha 7
Czech Republic

France / Europe Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 1143 Route De La Jairaz – 73120
Courchevel, France

Germany Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 1143 Route De La Jairaz – 73120
Courchevel, France

Greece / Croatia Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 1143 Route De La Jairaz – 73120
Courchevel, France

Indonesia Distributor : Divesea Indonesia

Contact Person : Chatra Hapsoro
E-mail : bigblue.id@gmail.com
Phone : 62-82145490450
Mail : Metro Park Residence, Unit MA-LG-05,
JL. Pilar Mas Utama Raya Kav 28,
Kebon Jeruk, Jakarta Barat 11520 Indonesia

Italy/ Malta Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 1143 Route De La Jairaz – 73120
Courchevel, France

Japan Distributor : Zero Co., Ltd.

Contact Person : Katsuhiko Saotome
E-mail : zero@zero-zero.co.jp
Phone : 81-3-5721-1906
Fax : 81-3-5721-1910
Mail : 1-11-5 Takaban, Meguro-Ku,
Tokyo, Japan

Korea Distributor : King Sports

Contact Person : Mr. Chang / Yun Hee Chang
E-mail : kingdive@kingsports.co.kr
Phone : 82-2-3628251
Mail : 35-4, 1GA, Manri-Dong, Chung-Gu,
Seoul, Korea

Kuwait Dealer : Ilmunz Marine Co.

Contact Person : Abdulrahman Al-Serheed
E-mail : ilmunz@ilmunz.com
Phone : +965 95500969
Mail : Creative Design Center , Block 1 , Street 10,
Building 63, Store 2.2,
Shuwaikh Industrial 1, Kuwait

Malaysia Distributor : Rainbow Runner Sdn Bhd

Contact Person : Sim
E-mail : ops@rainbowrunner.net
Phone : 60-341-622837
Fax : 60-341-617837
Mail : 5, Ukay Boulevard, Jalan Lingkaran
Tengah 2, Hulu Kelang, 68000 Ampang,
Selangor, Malaysia

Maldives Dealer : Sea Gear

Contact Person : Hussien Abdulla
E-mail : sales@seagear.com.mv
Phone : +960 3302737
Mail : M. Araliya – Ground Floor – Alhivila Magu,
20292 Male, Maldives

Mexico Distributor : Comercializadora UNIF Sa De CV

Contact Person : Tristan Termat
E-mail : tristan@unifmexico.com.mx
Phone : + 52 984 80 311 68
Mail : Calle 4 nte Mza 42 Lote 4-1 Local B Entre
25 y 30 Avenida Col. Centro Localidad :
Playa del Carmen, Q. Roo Municipio :
Solidandad CP: 77710 Mexico

New Zealand Distributor : Sea Tech Ltd.

Contact Person : Dave Moran
E-mail : info@seatech.co.nz
Phone : 64-9-5210684
Mail : 47 Tautari St. Orakei. Auckland 1071,
New Zealand

Philippines Distributor : Dive Supply Subic, INC.

Contact Person : Rowena Merto
E-mail : muriel@aquaventurewhitetip.com
Phone : 63-2-708-9996
Mail : Office 6&7 EMS Building, 14th Street
Subic Gate Perimeter Road, Subic Bay
Freeport Zone, Olango City,
2222 ,Philippines

Poland Distributor : Waterfall

Contact Person : Darek
E-mail : darek@waterfall.pl
Phone : 48-600-340-002
Mail : UL. Klimczaka 22D/3, 02-797 Warszawa
Poland PL 7621470585

Scandinavian Distributor : AquaFun AB

Contact Person : Sales Office
E-mail : info@aquafun.se
Phone : 46-0-40-295-300
Mail : Sangleksgatan 4E, 215 79, Malmo,
Sweden

Singapore Distributor : Divesea Pte Ltd

Contact Person : Fairuz Ahmad
E-mail : team@divesea.com.sg
Phone : 65-85115164
Mail : 3 Coleman Street, #02-15,
Peninsula Shopping Centre
Singapore 179804

South Africa Distributor : Manex & Power Marine

Contact Person : Gavin Jones
E-mail : gavin.jones@manex.co.za
Phone : 27-021-511-7292
Mail : 9 Paarden Eiland Road, Paarden Eiland,
South Africa

Spain/ Portugal Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 1143 Route De La Jairaz – 73120
Courchevel, France

Switzerland Distributor : Custom Diving Systems

Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 0 6 114 81 114
Mail : 1143 Route De La Jairaz – 73120
Courchevel, France

Thailand Distributor : Scuba Republic Thailand

Contact Person : Woranon Samakoses
E-mail : scubarepublicthailand@gmail.com /
bigbluelights@thailand@gmail.com
Phone : 66-0-617732363
Mail : 52 Moo 8, Theparatana (Bangna – Trad) Road,
KM. 7, Bangkaew, Bangplee,
Samutprakarn 10540 Thailand

Turkey Distributor : K Pro Doga Sportlari Malzemeleri Tic. Ltd. STI

Contact Person : Akin Kaftanoglu
E-mail : akinkaftanoglu@yahoo.com
Phone : 90-3124334479
Mail : Bulbulderesi Cad. No.: 23/A, Seyranbaglari,
Ankara, Turkey

U.A.E. Distributor : Senyar Marine Equipment

Contact Person : Abdulla Ai Kindi
E-mail : senyar7@gmail.com
Phone : 971-2-666-9999
Mail : P.O. Box 112790, Abu Dhabi, U.A.E.

United Kingdom / Ireland Distributor : Liquid Sports Ltd.

Contact Person : Yannig Charles
E-mail : alastair@liquidsports.co.uk
Phone : 44-0-7585-935522
Mail : 11 Stag Lane, Berkhamsted,
Hertfordshire, HP4 1FJ, UK



bigblue®

THE BRIGHTER IDEA

Headquarters :

Bosk International Company Limited

Contact Person : Oscar Tong

E-mail : oscar@bigblue.com.hk

Phone : 852-3568-0773

Fax: 852-3998-3127

Mail : Room 818, 8/F, Po Yip Building, 23, Hing Yip

Street, Kwun Tong, Hong Kong

Website : www.bigbluelights.com

www.bigblue.com.hk

US Sales Office : BosskUSA / Bigblue Dive Lights

Contact Person : Tim Ratcliffe

E-mail : sales@bigbluedivelights.com

Phone : 727-442-2300

Fax: 727-499-7117

Mail : 1710N Hercules Ave, Suite 103, Clearwater,
FL 33765 USA

Visit Us
on website



Like Us
on facebook

